


THERMAFLEX
M-KC

THERMAFLEX
M-KE AND G-KM

UNLINED SPIRAL WOUND
ALUMINUM DUCT

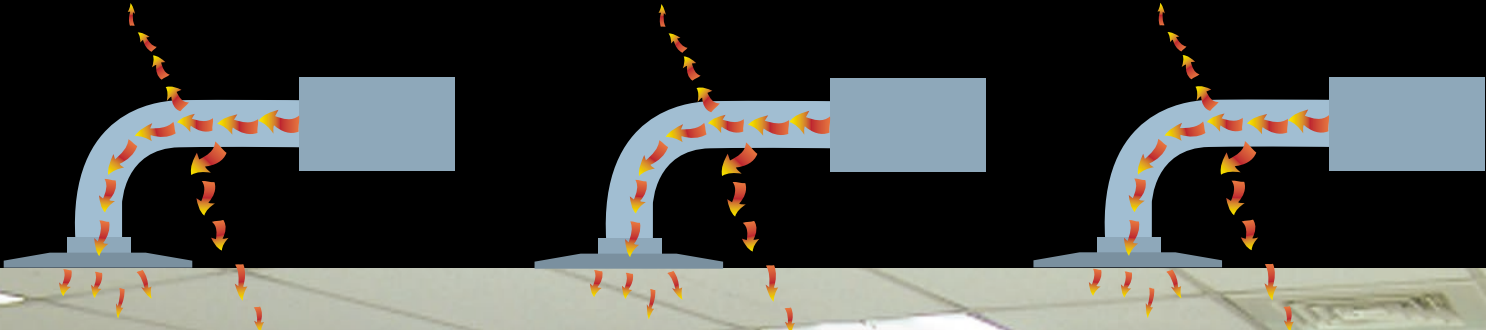

**ATTENUATED
SOUND LEVEL**

44 dB(A)
NC-38
RC-30(MF)

**SOUND LEVEL
DEPENDING
ON CEILING
TYPE**

21 dB(A)
<NC-15
<RC-15(N)

**ATTENUATED
SOUND LEVEL**

33 dB(A)
NC-24
RC-25(N)

**SOUND LEVEL
DEPENDING
ON CEILING
TYPE**

24 dB(A)
<NC-15
<RC-15(N)

**ATTENUATED
SOUND LEVEL**

46 dB(A)
NC-39
RC-38(N)

**SOUND LEVEL
DEPENDING
ON CEILING
TYPE**

<NC-15
<RC-15(N)



ENVIRONMENTALLY SOUND

At Thermaflex we strive to improve the quality of life for those around us, whether the classroom, boardroom, office or the hospital. Our MKE acoustical duct offers not only Acoustical Benefits but is Greenguard Certified and mold and mildew resistant. Standard duct systems reverberate sound through the duct while the MKE's superior inner liner transmits sound energy out into the plenum space while reducing noise levels in the occupied space.



Thermaflex®

**Toll Free Customer Service:
800.459.4822**

www.thermaflex.net
www.wereflexible.com
www.flexflowelbow.com